
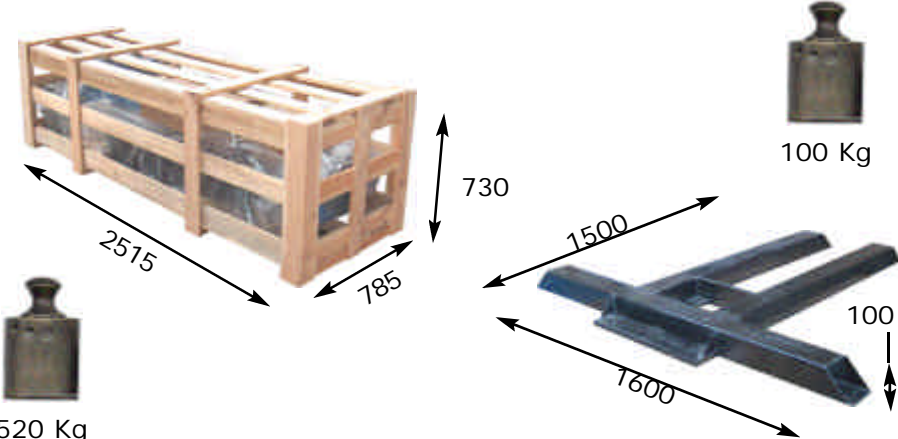



**Accessories / Zubehör / Accessoires:**

<p>Set (4) extensions Satz (4) Hebestücken Set (4) verhoogstukken</p>  <p>BA-V050/2014</p>		
---	--	--

**Technical specifications / Technische Spezifikationen / Technische specificaties:**

			AM 2014	AM 2014/1-Ph
Capacity	Tragfähigkeit	Hefvermogen	2.000 kg	1.800 kg
Lifting time	Hebezeit	Heftijd	45 s	45 s
Descent time	Absenkezeit	Daaltijd	45 s	45 s
Noise level	Lärmpegel	Geluidsniveau	65 dB (A) / 1 m	65 dB (A) / 1 m
Working temp.	Arbeitstemp.	Werktemp.	-10°C / + 50°C	-10°C / + 50°C
Working envir.	Arbeitsumgeb.	Werkomgeving	Indoor/Drinnen/Binnen	Indoor/Drinnen/Binnen
Motor power	Motorleistung	Motorvermogen	2,8 kW	2,8 kW
Electr. Supply	Anschlußwert	Aansl. waarde	400 V / 50 Hz / 3 Ph	230 V / 50 Hz / 1 Ph
Color	Farbe	Kleur	Ral5015 - 7038 - 9011	Ral5015 - 7038 - 9011
CE number	CE Nummer	CE nummer	04 205-3460/96	04 205-3460/96
Notified body	Notified body	Notified body	TÜV Product service	TÜV Product service

<p><b>Packing/Verpackung/Verpakking:</b></p>  <p>520 Kg</p> <p>100 Kg</p> <p>1500</p> <p>1600</p> <p>730</p> <p>185</p> <p>100</p>	<p><b>Container transport:</b></p>  <p>20 ft. = 18 pieces/Stück/stuks</p>
--	--