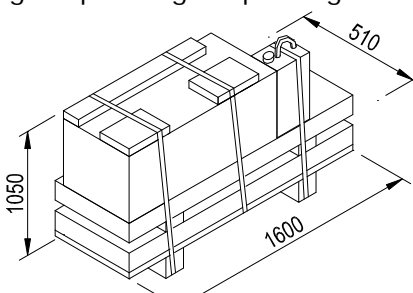




Accessories / Zubehör / Accessoires:

Technical specifications / Technische Spezifikationen / Technische specificaties:

			ASB-2504A	ASB-2504A/1Ph
Capacity	Tragfähigkeit	Hefvermogen	2.500 kg	2.500 kg
Lifting time	Hebezeit	Heftijd	22 s	22 s
Descent time	Absenkzeit	Daaltijd	22 s	22 s
Noise level	Lärmpegel	Geluidsniveau	70 dB (A) / 1 m	70 dB (A) / 1 m
Working temp.	Arbeitstemp.	Werktemp.	0 °C / + 45 °C	0 °C / + 45 °C
Working envir.	Arbeitsumgeb.	Werkomgeving	Indoor/Drinnen/Binnen	Indoor/Drinnen/Binnen
Motor power	Motorleistung	Motorvermogen	3,0 kW	3,0 kW
Electr. Supply	Anschlußwert	Aansl. waarde	400 V / 50 Hz / 3 ph	230 V / 50 Hz / 1 ph
Color	Farbe	Kleur	RAL 5015	RAL 5015
CE number	CE Nummer	CE nummer	follows/volgt	follows/volgt
Notified body	Notified body	Notified body	TÜV Product service	TÜV Product service

<p>Packing/Verpackung/Verpakking:</p>   <p>620 Kg</p>	<p>Container transport:</p>  <p>20 ft. = 21 pieces/Stück/stuks</p>
--	---

