

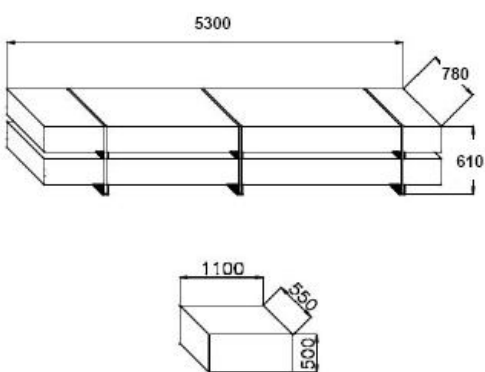



Accessories / Zubehör / Accessoires:

<p>Set (4) lighting Satz (4) Beleuchtung Set (4) verlichting</p>  <p>BA-A6/AST</p>	<p>Set (4) LED lighting Satz (4) LED Beleuchtung Set (4) LED verlichting</p>  <p>BA-A6LED/AST</p>	
--	---	--

Technical specifications / Technische Spezifikationen / Technische specificaties:

			ASLP5006/52	ASLP5006T/52
Capacity	Tragfähigkeit	Hefvermogen	5.000 kg	5.000 kg
Lifting time	Hebezeit	Heftijd	30 s	30 s
Descent time	Absenkezeit	Daaltijd	30 s	30 s
Noise level	Lärmpegel	Geluidsniveau	<74 dB (A) / 1 m	<74 dB (A) / 1 m
Working temp.	Arbeitstemp.	Werktemp.	-10 °C / +50 °C	-10 °C / +50 °C
Motor power	Motorleistung	Motorvermogen	4 kW	4 kW
Electr. Supply	Anschlußwert	Aansl. waarde	230/400V / 50Hz/ 3 Ph	230/400V / 50Hz/ 3 Ph
Air pressure	Luftdruck	Perslucht	6-8 bar	6-8 bar
Color	Farbe	Kleur	RAL 5015	RAL 5015
Working envir.	Arbeitsumgeb.	Werkomgeving	Indoor/Drinnen/Binnen	Indoor/Drinnen/Binnen

<p>Packing/Verpackung/Verpakking:</p>  <p>1.900 kg 2.000 kg</p>	<p>Container transport:</p>  <p>20 ft. = 9 pieces/Stück/stuks</p>
---	---