



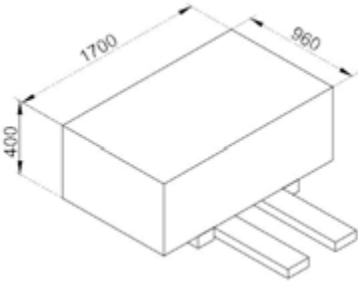




Accessories / Zubehör / Accessoires:

<p>Set (4) rubber blocks Set (4) Gummi-Blöcke Set (4) rubber blokken</p>  <p>BA-RB40 (4x 160x120x40mm) BA-RB80 (4x 160x120x80mm) BA-RB120 (4x 160x120x120mm)</p>	<p>Set (2) LED lighting Satz (2) LED Beleuchtung Set (2) LED verlichting</p>  <p>BA-A6LED/3225</p>	<p>Longer ramps Längere Rampen Langere oprijplaten</p>   <p>4x OTA1084489L</p>

Technical specifications / Technische Spezifikationen / Technische specificaties:

			ASLP3506	ASLP3506/1ph
Capacity	Tragfähigkeit	Hefvermogen	3.500 kg	3.000 kg
Lifting time	Hebezeit	Heftijd	42 s	60 s
Descent time	Absenkzeit	Daaltijd	35 s	55 s
Noise level	Lärmpegel	Geluidsniveau	<74 dB (A) / 1 m	<74 dB (A) / 1 m
Working temp.	Arbeitstemp.	Werktemp.	-10 °C / +50 °C	-10 °C / +50 °C
Motor power	Motorleistung	Motorvermogen	2,6 kW	2,2 kW
Electr. Supply	Anschlußwert	Aansl. waarde	230/400V / 50Hz/ 3 Ph	230V / 50Hz/ 1 Ph
Color	Farbe	Kleur	RAL 5015	RAL 5015
Working envir.	Arbeitsumgeb.	Werkomgeving	Indoor/Drinnen/Binnen	Indoor/Drinnen/Binnen

<p>Packing/Verpackung/Verpakking:</p>   <p>950 kg</p>	<p>Container transport:</p>  <p>20 ft. = 19 pieces/Stück/stuks</p>
---	---