
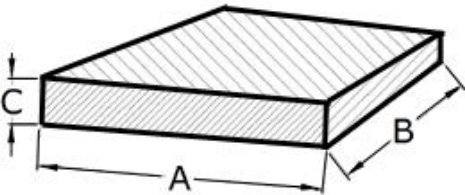




Accessories / Zubehör / Accessoires:

| | | |
|--|--|--|
| <p>Set (4) rubber blocks Set (4) Gummi-Blöcke Set (4) rubber blokken</p>  <p>BA-RB40 (4x 160x120x40mm) BA-RB80 (4x 160x120x80mm) BA-RB120 (4x 160x120x120mm)</p> | | |
| | | |

Technical specifications / Technische Spezifikationen / Technische specificaties:

| | | | ASB3004 | ASB3004HS |
|----------------|---------------|---------------|-----------------------|-----------------------|
| Capacity | Tragfähigkeit | Hefvermogen | 3.000 kg | 3.000 kg |
| Lifting time | Hebezeit | Heftijd | 30 s | 20 s |
| Descent time | Absenkzeit | Daaltijd | 35 s | 20 s |
| Noise level | Lärmpegel | Geluidsniveau | <74 dB (A) / 1 m | <74 dB (A) / 1 m |
| Working temp. | Arbeitstemp. | Werktemp. | -10 °C / +40 °C | -10 °C / +40 °C |
| Motor power | Motorleistung | Motorvermogen | 1,1 kW | 1,1 kW |
| Electr. Supply | Anschlußwert | Aansl. waarde | 400V / 50Hz / 3 Ph | 400V / 50Hz / 3 Ph |
| Color | Farbe | Kleur | RAL 5015 | RAL 5015 |
| Working envir. | Arbeitsumgeb. | Werkomgeving | Indoor/Drinnen/Binnen | Indoor/Drinnen/Binnen |

| | |
|---|--|
| <p>Packing/Verpackung/Verpakking:</p>  <p>A = 2000 B = 1800 C = 550</p>  <p>500 kg</p> | <p>Container transport:</p>  <p>20 ft. = 18 pieces/Stück/stuks</p> |
|---|--|